

Cast Iron BIB TAP



Salient Features:

Design : Screw-down Cast Iron Bib Tap screwed male end with Forged Brass Stem & Brass jumper

Range : 15mm & 25mm.

Marking : One side of the body "ALTO", & "Size".
Other side of the body "Tested 20kg/cm²".

Utility : Quite suitable for Water and Oil applications.

Temp. Range: 10° C to 200° C.

Testing : Hydraulically

Test Pressure				Max C.W.P	
Body		Seat		Body/Seat	
300 PSI	20 Kg/cm ²	300 PSI	20 Kg/cm ²	200 PSI	14 Kg/cm ²

DIMENSIONS : (in mm)


Size : (in mm)	B*
15	91
20	110
25	130

* Approx

MATERIALS:

Components	Material	Specification
Body, Gland Nut, Bonnet & Handle	Cast Iron	IS:210 Gr. FG-200
Stem & Jumper Valve	Brass	IS:3488
Disc	Synthetic rubber	BS-2751 BA 80
Gland Packing	Asbestos Yarn	IS : 4687-1980
Pin	Mild Steel	IS:226

ABV 4-05

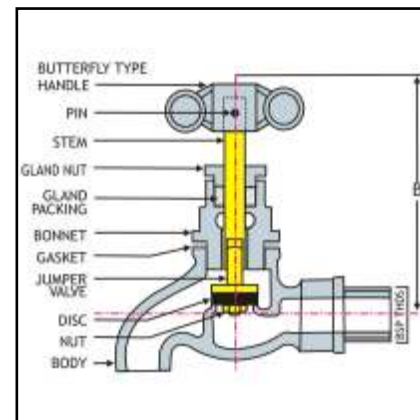

Cast Iron STOP VALVE



Salient Features:

Design : Screw-down Cast Iron Stop Valve screwed female ends with Forged Brass spindle & Brass

Range : 15mm & 25mm.

Marking : One side of the body 'ALTO ' & " Size".
Other side of the body " Tested 20kg/cm²".

Utility : Quite suitable for Water and Oil applications.

Temp. Range: 10° C to 200° C.

Testing : Hydraulically

Test Pressure				Max C.W.P	
Body		Seat		Body/Seat	
300 PSI	20 Kg/cm ²	300 PSI	20 Kg/cm ²	200 PSI	14 Kg/cm ²

DIMENSIONS : (in mm)


Size : (in mm)	A	B*
15	75	88
20	92	118
25	107	132

Tolerance: ±1.5 mm in 'A' * Approx

MATERIALS:

Components	Material	Specification
Body, Gland Nut, Bonnet & Handle	Cast Iron	IS:210 Gr. FG-200
Stem & Jumper Valve	Brass	IS:3488
Disc	Synthetic Rubber	BS-2751 BA 80
Gland Packing	Asbestos Yarn	IS : 4687-1980
Pin	Mild Steel	IS:226

AS 4-06

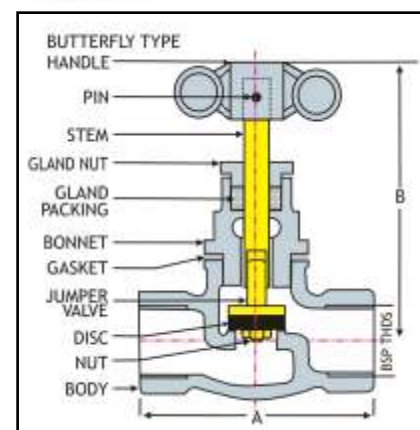

ALTO INDUSTRIES

185, Globe Colony,
Industrial Area,
Jalandhar 144 004 Punjab
INDIA

Phones : + 91-181-5000718, 2290590

Fax : + 91-181-2293602

Mobile : 09876544124

E mail : info@altovalves.com

website : www.altovalves.com